




See online
technical sheet

/ LW03-07

Pentagonal insulating universal stick

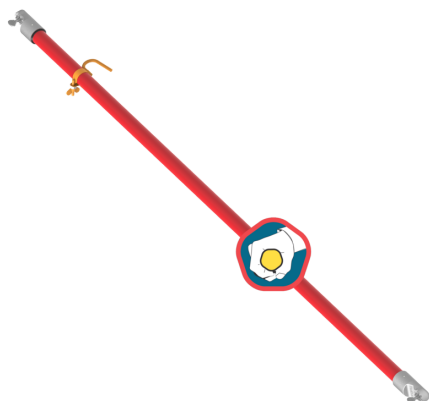

/ Standards

- CEI 60855-1
- ASTM F711
- IEC 60832-1
- ASTM F1825

/ Use

Ergonomic grip thanks to its pentagonal shape which is more adapted to the natural shape of the hand. The pentagonal insulating universal stick allows the use of tools with a universal attachment. Universal end fittings are located at each end of the stick.

Insulating tube in pentagonal shape, fiberglass over the foam core.



Universal end fittings with thumbscrews (M8 thread), made of corrosion-resistant metal.

See universal tools section for tools compatible with this pole.

/ Advantages

- Comfortable handling
- Lighter
- More rigid in flexion
- A solution for all tensions
- Varnish finish
- High UV resistance and longevity
- High mechanical strength

/ Areas of activity

-  Electrical distribution
-  Transport

/ Technical specifications

- Pole kind : Fixed
- Work type : Live working
- Operating voltage (V) : HTA (1 000 V to 50 000 V), HTB (> 50 000 V)
- Pipe kind : Pentagonal
- Color : Red

/ Accessories

	Reference	Designation
	49638299	Suspension hook
	49638300	Suspension hook
	LW14-10	Stick hanger
	LW14-05	Product cleaning
	TC53	Insulated silicone-coated cloth

/ Table legend

* Other lengths available on request (subject to volume)

Product reference	Total length (m)	Total length (inch)	Longueur isolante (m)	Insulating length (inch)	Pole weight (kg)	Pole weight (pounds)	Pipe diameter (mm)	Pipe diameter (inch)
LW03-07-32P-180	1.80	5'10"	1.70	5'6"	1.2	2.6	32	1"1/4
LW03-07-32P-255	2.55	8'4"	2.35	7'8"	1.7	3.7	32	1"1/4
LW03-07-32P-315	3.15	10'4"	2.95	9'8"	2.0	4.4	32	1"1/4
LW03-07-39P-315	3.15	10'4"	2.95	9'8"	2.7	6.0	39	1"1/2
LW03-07-32P-375	3.75	12'3"	3.55	11'7"	2.4	5.3	32	1"1/4
LW03-07-39P-375	3.75	12'3"	3.55	11'7"	3.6	7.9	39	1"1/2