




See online  
technical sheet

## / LW11-18 Rotary prong

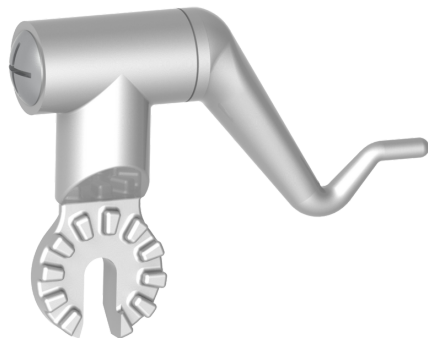

## / Standards

- IEC 60832-2

## / Use

The rotary prong is used for placing insulator ties with looped ends.  
Can also be used for moving, putting on and taking off light accessories with a ring, such as a come along clamp.  
Universal end cap and swivel hook, made of metal protected against corrosion.

## / Areas of activity



Electrical distribution



Transport

### / Technical specifications

- **Dimensions (mm)** : 115x105x20mm
- **Pole kind** : Pole accessories
- **Operating voltage (V)** : HTA (1 000 V to 50 000 V), HTB (> 50 000 V)
- **Pole adaptators** : Universal (U)
- **Accessory weight (kg)** : 0,18
- **Overall dimensions (Inch)** : 4,5x4,1x0,8 in.
- **Accessory weights (lbs)** : 0,4