




See online
technical sheet

/ ISOLINK

Isolink

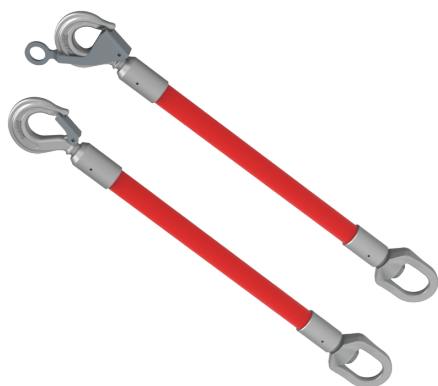

/ Standards

- ASTM F711
- IEC 60855-1

/ Use

The isolink, is generally used between a ratchet Hoist and a conductor in order to insulate the hoist while doing hot-line work. A lifting eye fixed on the latch it allows the lineman to place the Isolink on the conductor with the help of a clamstick.

/ Areas of activity



Electrical distribution



Transport

/ Technical specifications

- **Pulling undwinding devices** : Pulling devices
- **Product type** : Tirant
- **Operating voltage (V)** : HTA (1 000 V to 50 000 V)
- **Ø of tube(s)** : 32 mm

Product reference	Weight (kg)	CMU (daN)	Isolating length	Total length
ISOLINK-1-PTA	3,5	1815	0,3 m	0,5 m
ISOLINK-2-PTA	4,4	1815.	0.3 m	0.5 m