




See online
technical sheet

/ CSC E SERIE

Hinged single cleats

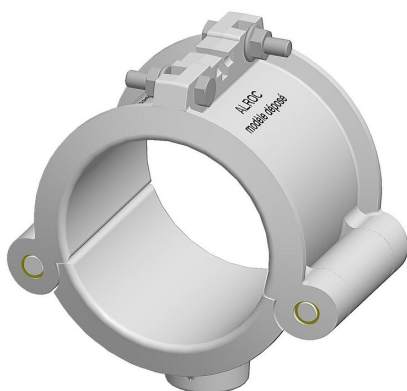

/ Standards

- IEC 61914
- RTE agregation

/ Use

Single cleats allow the holding of underground cables in horizontal or vertical position.

They are intended for the fixing of MV and HV cables of 42 to 142mm diameter.

Protective liner to be ordered separately.

/ Advantages

- Simple operation with easy close hinges
- Anti-friction stainless steel screws
- High vertical slip resistance
- Protective cable liner

/ Areas of activity

-  Electrical distribution
-  Production
-  Transport

/ Technical specifications

- **Areas of activity** : Electrical distribution, Production, Transport
- **Cable configuration** : Simple cleat
- **Collar type** : Aluminium
- **Tools king** : Specific tools
- **Cable configuration** : Simple
- **Material** : AS13 Aluminium, Stainless steel

/ Associated products

	Reference	Designation
	QCF SERIE	QCF SERIE
	QCA SERIE	Articulated end cleats
	PCSC SERIE	Mounting plates
	CAD	Socket wrench
	PCA SERIE	Singles protections
	CAE	Pin wrench

Product reference	Lenght	Width	Height	Cleat diameter	Cable diameter
CSC 60 E	112 mm	66 mm	121 mm	60 mm	42 - 47 mm
CSC 65 E	112 mm	66 mm	121 mm	65 mm	47 - 52 mm
CSC 70 E	121 mm	66 mm	125 mm	70 mm	52 - 57 mm
CSC 75 E	126 mm	66 mm	131 mm	75 mm	57 - 62 mm
CSC 80 E	134 mm	80 mm	138 mm	80 mm	62 - 67 mm
CSC 85 E	140 mm	80 mm	144 mm	85 mm	67 - 72 mm
CSC 90 E	145 mm	80 mm	150 mm	90 mm	72 - 77 mm
CSC 95 E	151 mm	80 mm	158 mm	95 mm	77-82 mm
CSC 100 E	157 mm	100 mm	163 mm	100 mm	82 - 87 mm
CSC 105 E	163 mm	100 mm	168 mm	105 mm	87 - 92 mm
CSC 110 E	169 mm	100 mm	175 mm	110 mm	92 - 97 mm
CSC 115 E	174 mm	100 mm	180 mm	115 mm	97 - 102 mm
CSC 120 E	180 mm	100 mm	186 mm	120 mm	102 - 107 mm
CSC 125 E	186 mm	100 mm	191 mm	125 mm	107 - 112 mm
CSC 130 E	192 mm	100 mm	194 mm	130 mm	112 - 117 mm
CSC 135 E	198 mm	100 mm	205 mm	135 mm	117 - 122 mm

Product reference	Lenght	Width	Height	Cleat diameter	Cable diameter
CSC 140 E	201 mm	100 mm	205 mm	140 mm	122 - 127 mm
CSC 145 E	206 mm	100 mm	210 mm	145 mm	127 - 132 mm
CSC 150 E	210,3 mm	100 mm	214 mm	150 mm	132 - 137 mm
CSC 155 E	215 mm	100 mm	220 mm	155 mm	137 - 142 mm