




See online
technical sheet

/ LW08-08

Anchoring bracket 2200

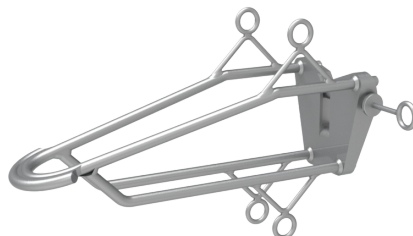

/ Use

Placed behind the ball-socket, and secured by its locking system, the anchor clamp provides a fixed mooring point to allow all maintenance work required on dead ends and realization of double dead ends.

/ Areas of activity



Electrical distribution



Transport

/ Technical specifications

- Pulling undwinding devices : Pulling devices
- Operating voltage (V) : HTA (1 000 V to 50 000 V)
- Length (mm) : 400
- Width (mm) : 225
- Height (mm) : 120
- Weight (kg) : 4
- Support material : Metal
- CMU (daN) : 2200
- Clamping capacity (mm) : Ouverture gorge : 21mm