




See online
technical sheet

/ LW14-02

Tie-back connector

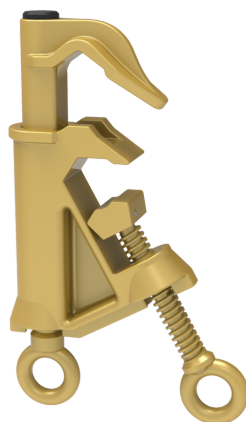

/ Use

The Tie-back connector is used as an auxiliary part, to temporarily secure a conductor without mechanical tension.

It is used, for example, for :

- To prepare the connection of a jumper by means of a coupling other than a ringed connector.
- Hold flapped down on the conductor a jumper whose end is not equipped with a ringed connector.

It is used on copper and aluminium conductors.

It is not to be used to assume an electrical connection; its use is temporarily only.

Clamping capacity of the jaws: from 12.5 mm² (#6) to 250 mm² (490 kcmils), which corresponds to wires or cables with a diameter between 4 mm (.16") and 18 mm (0.71").

/ Areas of activity



Electrical distribution



Transport

/ Technical specifications

- Areas of activity : Electrical distribution, Transport
- Weight (Kg) : 1
- Dimensions (mm) : 250x120x35

/ Accessories

	Reference	Designation
	LW03-01	CLAMPSTICK - EXTERNAL ROD