




See online  
technical sheet

**/ LW06-06**

Lockable eyescrew threaded clamp

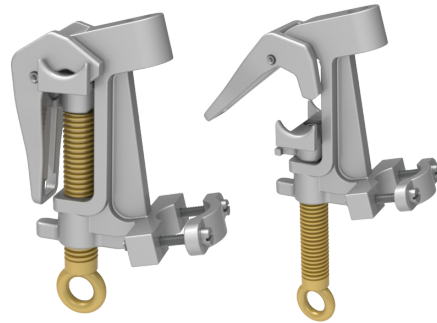

**/ Use**

The lockable eyescrew threaded clamp is used on each extremity of the insulated by-pass jumpers. The lockable system is to assure that after 2 turns of the eyescrew with a clampstick that the accidental removal of the lockable clamp will be avoided.





**/ Areas of activity**

 Electrical distribution

## / Technical specifications

- Clamping capacity (mm) : Ø4 à 25mm (12,5 à 490mm<sup>2</sup>)
- Eyelet clamping capacity (mm) : Max 18mm
- Dimensions (mm) : 183x84x67
- Weight (Kg) : 0,7

## / Associated products

	Reference	Designation
	LW06-04	Insulated by-pass jumpers
	LW06-01	Temporary lock-out tag-out switch
	LW06-02	Temporary load disconnect switch
	LW14-03	Ring spanner