




See online
technical sheet

/ LW02-12 Insulating beam

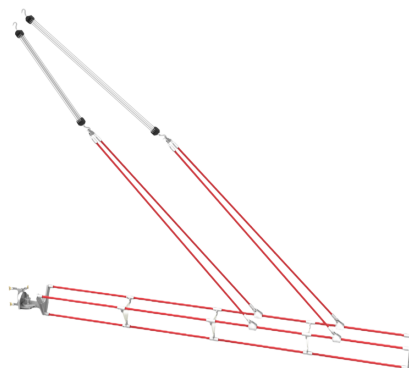

/ Use

The beam is used to move an operator and position him at his workstation. Once on the beam, the operator must secure himself to the beam, to the exclusion of any other securing point. Hoists, ropes and ties used with the beam must be used exclusively for this purpose (sold separately).

/ Areas of activity



Electrical distribution



Transport

/ Technical specifications

- Operating voltage (V) : HTB (> 50 000 V)

Product reference	Weight (kg)	Tube(s) Ø	Total length (m)	Insulating length (m)
LW02-12-EB	17	39	3	2,80
LW02-12-EI	7	39	1,50	1,40
LW02-12-ET-150	7,8	39	1,50	1,40
LW02-12-ET-225	12,7	39	2,25	2
LW02-12-TIR-300	2,7	32	3	2,80
LW02-12-TIR-360	3	32	3,60	3,40