




See online
technical sheet

/ LW09-13-30

Jumper and accessories for 30T anchors

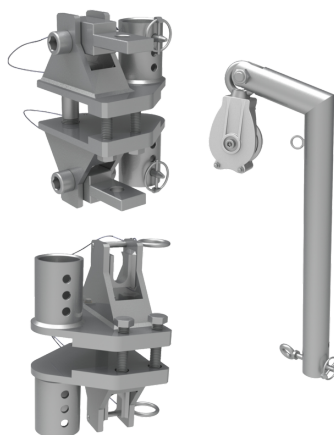

/ Use

Combined with clevis-and-tenon tie rods (ref. LW04-18) and hydraulic jacks, the 30 t anchor tensioning brackets and accessories are designed to take up the mechanical tension of 30 t anchors.

Combined with a cradle, this set enables the replacement of rows of insulators.

The device contains :

- 1 set of riders for PR 15/600 --> dimensions: 160x155x115mm; Weight: 5 Kg; CMU: 3000 daN
- 1 set of riders for PM 30/600 --> dimensions: 160x155x115mm; Weight: 5 Kg; CMU: 3000 daN
- 2 Scalloped adapter pieces --> dimensions: 140x40x40mm; Weight : 0,7 Kg; CMU : 3000 daN
- 2 Ball thrust bearings --> dimensions : 65x40x40mm; Weight : 0,7 Kg; CMU : 3000 daN
- 2 Gallows each fitted with a type 852 pulley --> dimensions : 565x180x50mm; Weight : 6 Kg; CMU : 400 daN

/ Technical specifications

- **Pulling undwinding devices** : Undwinding devices
- **Product type** : Rider(s)
- **Operating voltage (V)** : HTB (> 50 000 V)

Product reference	Weight (kg)	CMU (daN)	Dimensions (mm)
Cavalier pour PR 15/600	5	3000	160x155x115
Cavalier pour PM 30/600	5	3000	160x155x115
Pièce d'adaptation chantournée	0,7	3000	140x40x40
Potence équipée d'une poulie type 852	6	400	565x180x50