




See online
technical sheet

/ FTU

Maneuvering bows

/ Standards

- CEI 61235

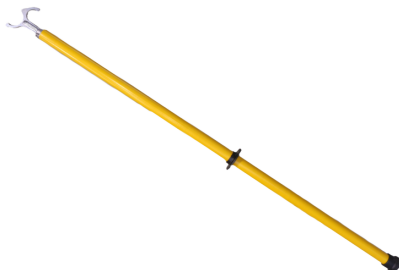

/ Use

Insulating bows made of fiberglass tube

Insulating bows made of fiberglass tube with high mechanical and dielectric properties according to IEC 61235 Standards : Hollow tubes

Double hook head for switch disconnector operation.

Optional: carrying bag

/ Areas of activity



Cable & Connections



Electric mobility



Substation



Electrical distribution



Production



Electric traction



Industry



Civil security



Transport

/ Technical specifications

- Pole kind : Fixed
- Operating voltage (V) : BT (50 V to 1000 V), HTA (1 000 V to 50 000 V), HTB (> 50 000 V)
- Pipe kind : Rounded
- Length max unfolded (m) : Da 1.5 a 6
- All weather (kV) : Da 30 a 380
- Hand shield
- Color : Yellow



Part number	Lenght max unfolded (m)	All weather (kV)
1	1.5	30
1	2	60
2	3	150
2	4	220
3	6	380