




See online
technical sheet

/ PIMT410

Earthing and Short-Circuiting System for MV substations

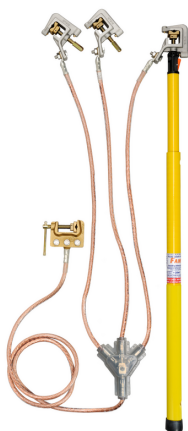

/ Standards

- CEI 61230

/ Advantages

- Ensures that the malt holds in the event of a short circuit
- Fast and easy to use

/ Areas of activity



Electrical distribution



Transport



Industry






Civil security

/ Technical specifications

- Product kind : Dispositif
- Clamp material : Aluminium
- Operating voltage (V) : HTA (1 000 V to 50 000 V)
- Short-circuit intensity kA/Is : 13
- Composition : 3x MT516
- Type of trifurcation : T = Trifurcation with PVC coating
- Cable material : Copper
- Phase câble
- Phase cable number : 3
- Phase(s) cable cross-section (mm²) : 50
- Phase(s) cable length (m) : 0,8
- Floor cable
- Cross-section (mm²) : 50
- Floor cable length (m) : 2
- Measurement : 910x240x105mm
- Weight (kg) : 11

/ Products contained in the kit

	Reference	Designation
	NB8	Earthing clamp
	MT516	Earthing clamp
	TR245	Telescopic sticks