




See online  
technical sheet

## / CORATRIF03

Complete earthing and short-circuiting device

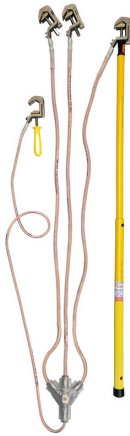





## / Standards

- CEI 61230

## / Advantages

- High clamping capacity
- Fast and easy to use






## / Areas of activity

-  Electrical distribution
-  Industry
-  Civil security
-  Transport

## / Technical specifications

- Product kind : Earthing equipment/kits
- Clamp material : Cupro-alu
- Clamp tightening (mm) : Rond : Ø7 à 37mm, Plat : jusqu'à 37mm, Boule : Ø20 et 25mm
- Conductor type : Ball, Round, Flat
- Operating voltage (V) : HTA
- Short-circuit intensity kA/1s : 18,5
- Type of trifurcation : T = Trifurcation with PVC coating
- Phase câble
- Phase cable number : 3
- Phase(s) cable cross-section (mm<sup>2</sup>) : 70
- Phase(s) cable length (m) : 0,8
- Floor cable
- Cross-section (mm<sup>2</sup>) : 35
- Floor cable length (m) : 10
- Measurement : 910x240x105mm
- Weight (kg) : 16

## / Products contained in the kit

	Reference	Designation
	NBD25M	Earthing clamp for fixed ball points
	T70008C35100C	Set of cables for short-circuiting and earthing devices
	NBD25AP	Earthing clamp for fixed ball points
	CM535	Empty metal box for earthing device
	TR245	TR245