



See online  
technical sheet

## / SIPOACAMA

APE set with grounding clamp (CDTA) with magnetic lock



## / Standards

- CEI 61230


## / Use

The CDTA grounding clamp allows you to maintain the clamp-to-earth (APE) servo-control for the following grounding operations:

- Shunt grounding,
- Multiple MALTs on a multi-beam transmission network, especially when towers are painted, to avoid potential differences. The CDTA clamp clamp, connected to the SA342AN clamp, cannot be removed thanks to the horizontal axis, which prevents loosening as long as a SMAPE SAGTE25 clamp from an SIPOAGTMA assembly is still present on it. The operation of the clamp/vice interlock remains unchanged.

## / Technical specifications

- Product kind : Dispositif
- Operating voltage (V) : HTB (> 50 000 V)
- Short-circuit intensity kA/Is : 31,5
- Key type : Magnetic
- Measurement : 310x210x70mm
- Weight (kg) : 3,8

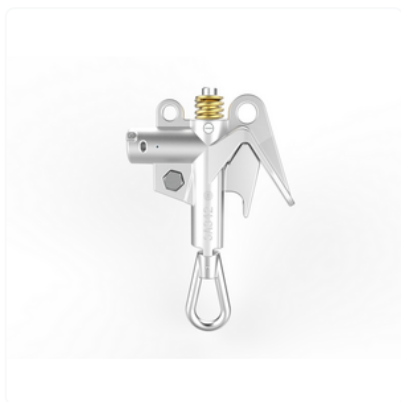

## / Products contained in the kit

	Reference	Designation
	CDTA	Earth collector clamp
	SA342AN	Earthing clamp with SMAPE