




See online technical sheet

## / TP51

Tester Clamp for flat contacts

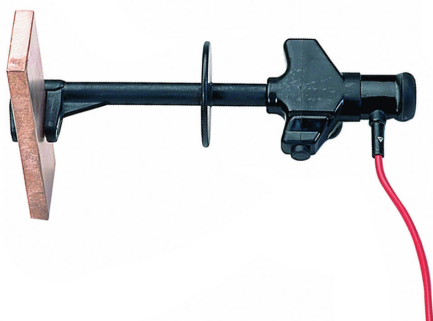

### / Standards (old)

IEC 61010-031

### / Use (old)

Completely insulated tester clamp for quick connection to busbars (on LV installations, for example).

### / Technical specifications (old)

Clamp with 4 mm output for safety patchcord.

Dedicated Voltage : 600V CAT III

The TP51N2 clamp may be fitted with 2617-IEC or 2217/600V safety patchcord and fuses have to be ordered separately (Ref. TFO4).

Product reference	Description	Fusible	Intensité	Ouverture du bec
TP51N1	Tester Clamp for flat contacts	No	32 A max	0 to 10 mm
TP51N2	Tester Clamp with fuse for flat contacts	Yes : integrated HPC	20 A max	4 to 12 mm