



See online
technical sheet

/ AFSIB-COM12 / AFSIB-COM12-BR

Arc Flash coveralls, APC 1, ATPV 15 cal/cm², ELIM 13 cal/cm²



/ Standards

- EN ISO 11612:2015 (Flamme and heat) : A1, B1, C1, E2, F1
- EN ISO 11611:2015 (Welding protection) : Class 1
- EN13034:2005+A1:2009 (Chemical protection) : Type PB[6]
- EN1149 (Electrostatic property) : EN1149-5
- IEC 61482-2
- EN 61482:2 : APC 1 (4Ka)
- ELIM (cal/cm²) : 13
- CE category : Catégory 3

/ Use

Perfect coveralls for electricians against thermal hazards, occuring during works on electricity networks !

/ Advantages

- The FR (flame retardant) properties of the garment are guaranteed for 50 washes.
- ATEX zone: for use in explosive atmospheres
- Very good mechanical strength (abrasion and tear resistance)
- Double certification for fabric + garment according to IEC 61482
- Dual certification using 2 test methods: BOX TEST & OPEN ARC
- Double qualification according to ATPV and ELIM for OPEN ARC
- No metal parts (non-magnetic)
- Pictograms visible on garment
- ATPV protection level visible on garment

/ Areas of activity



Cable & Connections



Electric mobility



Electric traction



Electrical distribution



Production



Transport





Industry



Substation

/ Technical specifications

- **Main color** : Dark blue
- **Size** : XS, S, M, L, XL, 2XL, 3XL, 4XL, 5XL
- **Workwear color** : Orange
- **Fastening** : Zipper fastening, Flap, Snap fastener
- **Collar style** : Low blas collar
- **Support details** : 79% coton | 20% polyester | 1% de fibre antistatique
- **Cloth composition table** : Tissu - 79% cotton 20% polyester 1% antistatic fiber - 300 gsm | Col montant | Fastening - Zip, Snap fastener, Flap | Wrists - Adjustable, Elastic, Snap fastener | 5x Poche (bas du corps) - outside front top left, outside front top right, Exterior rear top right pocket, Exterior left leg pocket, Outer right leg

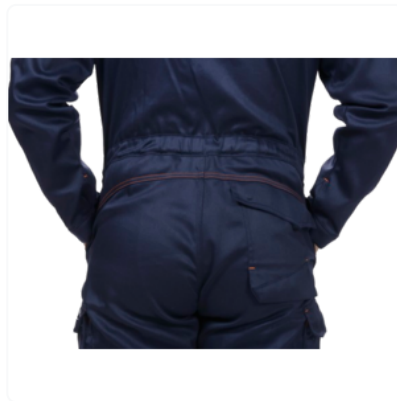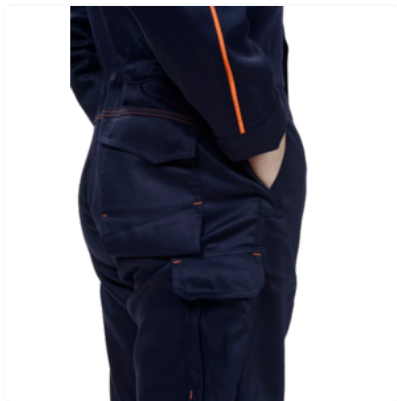

Product reference	Top Reflective piping	Bottom reflective piping	EN17353:2020
AFSIB-COM12	-	-	-
AFSIB-COM12-BR	Arm	Pant (1 band)	Type B2