




See online
technical sheet

/ LW04-18

Clevis and tenon stick

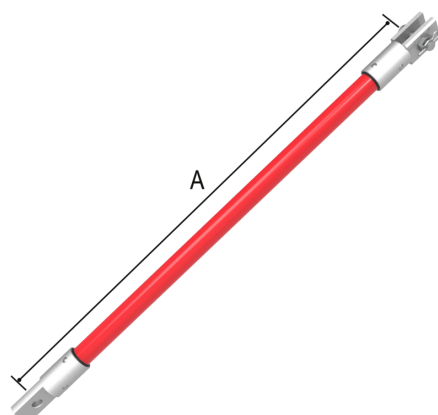

/ Standards

- IEC 60832-1

/ Use

The clevis and tenon stick is used : either alone or in pairs for replacing dead-end insulators or string insulators. When it is equipped with appropriate attachment for performing various operations.

See clevis and tenon stick accessories in the table below.

A clevis and tenon stick.

The desired lengths has to be defined from the table below.

/ Areas of activity



Electrical distribution



Transport

/ Technical specifications

- Pulling undwinding devices : Pulling devices
- Product type : Tirant
- Operating voltage (V) : HTB (> 50 000 V)
- Ø of tube(s) : 39 mm

Product reference	Cote A	Weight (kg)	CMU (daN)	Isolating length	Total length
LW04-18-39-059	0,52 m	3,0	4500	0,30 m	0,59 m
LW04-18-39-089	0,85 m	3,33	4500	0,60 m	0,89 m
LW04-18-39-109	1,02 m	3,5	4500	0,80 m	1,09 m
LW04-18-39-129	1,22 m	3,6	4500	1,0 m	1,29 m
LW04-18-39-159	1,52 m	3,9	4500	1,30 m	1,59 m
LW04-18-39-183	1,76 m	4,0	4500	1,54 m	1,83 m
LW04-18-39-189	1,82 m	4,1	4500	1,60 m	1,89 m
LW04-18-39-199	1,92 m	4,2	4500	1,70 m	1,99 m
LW04-18-39-209	2,02 m	4,3	4500	1,80 m	2,09 m
LW04-18-39-229	2,22 m	4,4	4500	2,0 m	2,29 m
LW04-18-39-259	2,52 m	4,6	4500	2,30 m	2,59 m
LW04-18-39-283	2,76 m	4,7	4500	2,54 m	2,83 m
LW04-18-39-299	2,92 m	4,9	4500	2,70 m	2,99 m
LW04-18-39-329	3,22 m	5,2	4500.	3,0 m	3,29 m