




See online technical sheet

/ LW07-14
Flat pole clamp

/ Standards

- IEC 61236

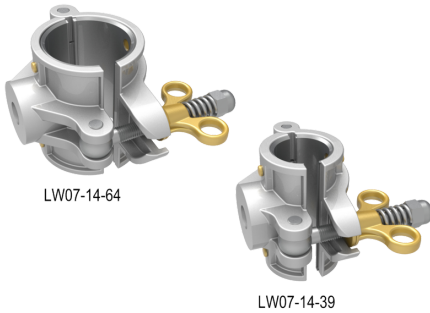

/ Use

Directly attached to the saddle, this clamps brings the conductor support stick closer to the support when required for certain interventions.

The use of a rope block is recommended for the maneuvering of the support stick Ø 64 mm (2 ½”).



It is recommended to check the tightening torque of the wingnut using a torque wrench and the wing nut socket (sold separately).

Corrosion protected metal sleeve consisting of :

- 2 shells with stainless steel fittings
- A wing nut with an anti-friction washer

Recommended tightening torque on the wing nut: 17 N.m / 12.5 lb.ft (wing nut socket sold separately)

/ Areas of activity

-  Electrical distribution
-  Transport

/ Technical specifications

- Operating voltage (V) : HTA, HTB

/ Associated products

	Reference	Designation
	LW08-38	Forked driver support
	LW04-01	Conductor support stick

Product reference	Maximum working load (MWL)	Length	Width	Height	Pole-climbers max capacity (mm)	Weight (kg)
LW07-14-39	Dans l'axe de la perche : 130daN à l'axe de la perche : 180daN	150 mm	130 mm	100 mm	Ø39 ±1	0,9
LW07-14-64	Dans l'axe de la perche : 220daN à l'axe de la perche : 310daN	165 mm	155 mm	100 mm	Ø64 ±1	1,3