



See online technical sheet

## / DSGFPFBxxx

Gas line shunting device



## / Use

The device enables electrical discharge of a gas conduit during installation or removal. The gas conduit is divided into 3 parts. Only the intermediate part needs to be removed. The device is fixed in a flange hole to connect the two ends of the gas conduit. Each end is also connected on either side to the part of the gas duct to be removed (intermediate part).

Composition of the device:


- 6 gas conduit adapters (FPFBxxx)
- 6 MALT clamps with handle for fixed ball points (NBD25M)
- 1 equipotential bonding cable connecting the two ends to each other, section 35mm<sup>2</sup>, length 5m (TEQ3505DD)
- 2 cables connecting the two ends to the part to be removed, section 35mm<sup>2</sup>, length 15m (TFK3515DD)
- 1 transport bag (SAP4AN)
- 1 bag for the adapters (HOUTCH42)

Option:

- Gazel

## / Technical specifications

- Product kind : Earthing equipment/kits

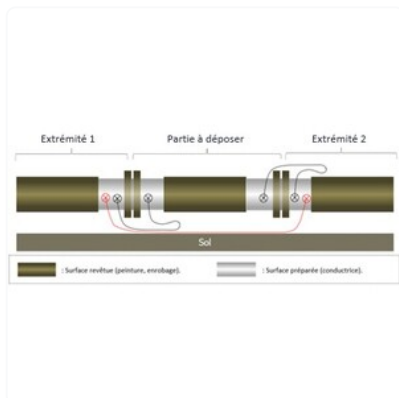

Product reference	Designation	Adapter type
DSGFPPFB25	Device for Ø25 flange hole	FPFB25
DSGFPPFB28	Device for Ø28 flange hole	FPFB28
DSGFPPFB32	Device for Ø32 flange hole	FPFB32
DSGFPPFB35	Device for Ø35 flange hole	FPFB35
DSGFPPFB38	Device for Ø38 flange hole	FPFB38