




See online
technical sheet

/ PIMT16

Earthing and Short-Circuiting System for MV substations

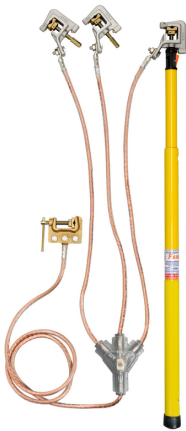





/ Standards

- CEI 61230

/ Advantages

- Ensures that the malt holds in the event of a short circuit
- Fast and easy to use






/ Areas of activity

-  Electrical distribution
-  Transport
-  Industry
-  Civil security

/ Technical specifications

- Product kind : Earthing equipment/kits
- Clamp material : Aluminium
- Operating voltage (V) : HTA
- Short-circuit intensity kA/1s : 8
- Composition : 3x MT516 + 3x MT416 + 3x MT525
- Type of trifurcation : T = Trifurcation with PVC coating
- Cable material : Copper
- Phase câble
- Phase cable number : 3
- Phase(s) cable cross-section (mm²) : 35
- Phase(s) cable length (m) : 0,8
- Floor cable
- Cross-section (mm²) : 35
- Floor cable length (m) : 2
- Measurement : 910x240x105mm
- Weight (kg) : 13,5

/ Products contained in the kit

	Reference	Designation
	NB8	Earthing clamp
	MT516	Earthing clamp
	MT416	Earthing clamp
	MT525-MT550	Earthing and short-circuiting clamp for medium-voltage substations
	TR245	TR245