


## / DMTBTTR4

LV Short-circuiting and Earthing Device for panel boards and cabinets



See online technical sheet

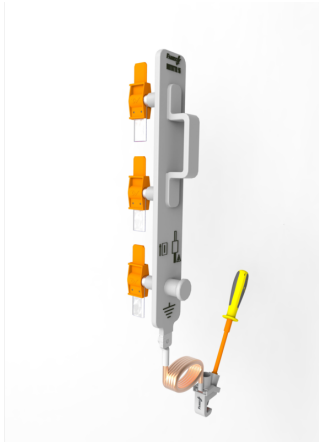

## / Standards

- CEI 61230

## / Use




The insulated, portable and rigid device, equipped with fuse links, allows earthing and short-circuiting of a low-voltage switchboard or cabinet.

The fuses are connected by a rigid, conductive metal plate, with a center-to-center distance of 185mm.

## / Advantages

- Foolproof system which ensures correct positioning and user safety

## / Areas of activity

-  Electrical distribution
-  Industry
-  Civil security

## / Technical specifications

- Product kind : Dispositif
- Operating voltage (V) : BT (50 V to 1000 V)
- Field of use (environment) : Station office
- Station office : Before electric meter
- Before electric meter : Board
- Short-circuit intensity kA/Is : 4
- Floor cable
- Cross-section (mm<sup>2</sup>) : 16
- Floor cable length (m) : 2
- Measurement : 650x170x85mm

