




See online
technical sheet

/ DMTBT3245CH25

Short-circuiting and earthing device for bare LV overhead lines

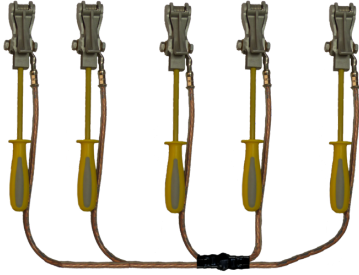




/ Standards

- CEI 61230

/ Use

Device for short-circuiting LV networks and, if necessary, for grounding.




/ Areas of activity

-  Electrical distribution
-  Industry
-  Civil security

/ Technical specifications

- Product kind : Dispositif
- Clamp tightening (mm) : Ø3 à 24mm
- Operating voltage (V) : BT (50 V to 1000 V)
- Field of use (environment) : Aerial or transformation station
- Short-circuit intensity kA/Is : 6,5
- Composition : Pentafurcation de 5 pinces BT324700
- Cable material : Copper
- Phase cable number : 5
- Phase(s) cable cross-section (mm²) : 25
- Phase(s) cable length (m) : 0,8
- Measurement : 910x240x105mm
- Weight (kg) : 10,0

/ Products contained in the kit

	Reference	Designation
	CM535	Empty metal box for earthing device
	BT324700	Earthing and short-circuiting clamp for LV overhead lines
	ETRDMTBTT2508C	Set of cables for short-circuiting and earthing devices