



See online  
technical sheet

## / **330F220400C6** Voltage detector TAG330



### / Standards

- IEC 61243-1: VOLTAGE DETECTORS CAPACITIVE TYPE TO BE USED FOR VOLTAGES EXCEEDING 1 kV A.C
- CE compliant

### / Use

- Device designed to test the absence of nominal voltage on HV systems from 50 kV to 765 kV.
- It will detect any nominal voltage present on networks or substation and must not detect induced voltages in order to allow the grounding operation.

### / Advantages

- This original configuration adapted to VHV and giving very high performances in the case of high induction and electric fields disturbance.
- Design adopted by our most demanding users.
- Protected circuit Board.
- Glossy PC housing for easy cleaning.
- Self test by Voltage injection on probe socket.
- Test of battery level and threshold stability.

### / Areas of activity


-  Production
-  Substation
-  Transport

## / Technical specifications

- Power type : Alternating power
- Network frequency (Hz) : 60V
- Voltage range : 220-400
- Condition of use : Outside
- Temperature of use (C°) : -25...+55
- Humidity (Max) (%) : 96
- Battery type : 9V battery (x1)
- Connector type : Universal (U)
- Electrode type (mm) : AC60, AC120, D100
- Case material : Polycarbonate
- Color : Red
- Measurement (mm) : 215 x 90 x 90
- Weight (kg) : 0,529
- Notice : PACK F (FR/GB/DE/ES/PT/PL)
- Packaging : Metal case



Voltage presence indication

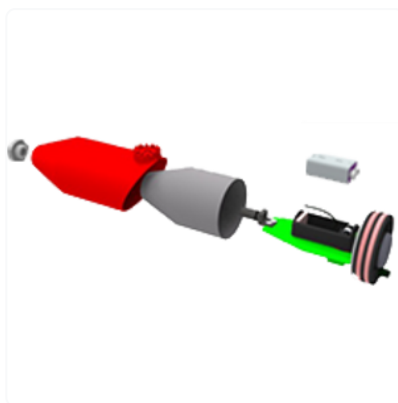

Acces battery



Soft case