




See online
technical sheet

/ CS V SERIE

Single half-shell aluminium cleats

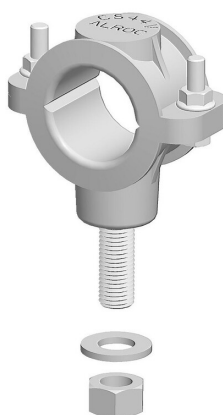

/ Use

Single cleats allow the holding of underground cables in horizontal or vertical position.

They are intended for the fixing of MV cables of 28 to 39mm diameter.

Protective liner to be ordered separately.

/ Advantages

- High vertical slip resistance
- UV resistant
- Protective cable liner

/ Areas of activity

-  Electrical distribution
-  Production
-  Transport

/ Technical specifications

- **Areas of activity** : Electrical distribution, Production, Transport
- **Material** : AS13 Aluminium
- **Lenght (mm)** : 100
- **Width (mm)** : 45
- **Height (mm)** : 91
- **Material** : AS13 Aluminium / Stainless Steel
- **Collar type** : Aluminium
- **Tools king** : Specific tools
- **Cable configuration** : Simple

/ Associated products

	Reference	Designation
	PC SERIE	Single protections

/ Tableau de mesure - colliers

Product reference	Cable diameter (mm)	Cleat diameter (mm)	Protection reference
CS 44 V	28 - 32	44	PC 10-44
CS 44 V	32 - 35	44	PC 8-44
CS 44 E	28 - 32	44	PC 10-44
CS 44 E	32 - 35	44	PC 8-44
CS 47,5 V	35 - 37	47,5	PC 10-47,5
CS 47,5 V	37 - 39	47,5	PC 8-47,5
CS 47,5 E	35 - 37	47,5	PC 10-47,5
CS 47,5 E	37 - 39	47,5	PC 8-47,5