




See online
technical sheet

/ LW03-04-32-381 Hinged clampstick

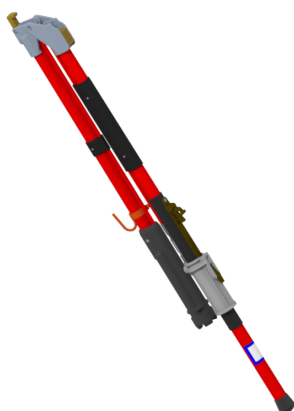

/ Standards

- CEI 60855-1
- ASTM F711
- IEC 60832-1
- ASTM F1825



/ Use

The Clampstick is the most universal tool used to install and remove personal protective grounding clamps, to install plastic and rubber cover-up equipment, etc...
Insulating tube, fiberglass over the foam core. Control rod is also made of insulating material.
High-performance plastic pole head with integrated and replaceable hook.

/ Advantages

- A solution for all tensions
- High mechanical strength

/ Areas of activity

-  Electrical distribution
-  Transport

/ Technical specifications

- Pole kind : Foldable
- Work type : Live working
- Operating voltage (V) : HTA (1 000 V to 50 000 V), HTB (> 50 000 V)
- Pipe kind : Rounded
- Length max unfolded (m) : 3.81
- Unfolded length max (inch) : 12'6"
- Folded length (m) : 1.93
- Folded length (inch) : 6'3"
- Pole weight (kg) : 4.88
- Pole weight (pounds) : 10.8
- Pipe diameter (mm) : 32
- Pipe diameter (inch) : 1"1/4
- Color : Red
- Rod diameter (mm) : 10
- Rod diameter (inch) : 2/5"