




See online
technical sheet

/ CSC 120 V

Hinged single cleats

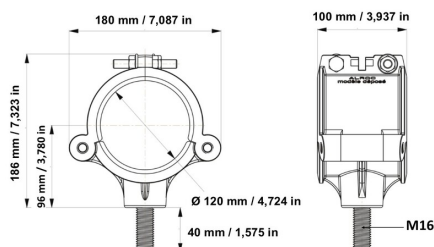

/ Standards

- IEC 61914
- RTE aggregation

/ Use

Single cleats allow the holding of underground cables in horizontal or vertical position.

They are intended for the fixing of MV and HV cables of 42 to 142mm diameter.

Protective liner to be ordered separately.

/ Advantages

- Simple operation with easy close hinges
- High vertical slip resistance
- UV resistant
- Protective cable liner

/ Areas of activity

-  Electrical distribution
-  Production
-  Transport

/ Technical specifications

- **Areas of activity** : Electrical distribution, Production, Transport
- **Lenght (mm)** : 180
- **Width (mm)** : 100
- **Height (mm)** : 186
- **Cable configuration** : Simple cleat
- **Material** : AS13 Aluminium / Stainless Steel
- **Load (daN)** : 788
- **Distance between conductors (S) (mm)** : 125
- **Distance between cleats (Distance D) (m)** : 1
- **Min / Max Operating Temperature (°C)** : -25° / 85°
- **Cleat diameter (mm)** : 120
- **Collar type** : Aluminium
- **Cable diameter (mm)** : 102 - 107
- **Tools king** : Specific tools
- **Cable configuration** : Simple
- **Material** : AS13 Aluminium, Stainless steel

/ Associated products

	Reference	Designation
	PCA 10-120	Singles protections
	PCA 8-120	Singles protections