


/ LW04-19 Multi head link stick



See online
technical sheet

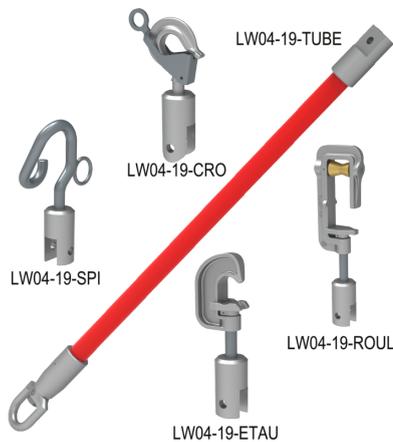

/ Standards

- ASTM F711
- IEC 60855-1

/ Use

The multi head link stick is used as an intermediate insulating device that allows the operators to apply tensile forces to a workpiece or a conductor. The tool can be applied in different situations, depending on the choice of head chosen.

/ Areas of activity

 Electrical distribution

/ Technical specifications

- Product type : Tirant
- Pulling undwinding devices : Pulling devices
- Ø of tube(s) : 32 mm
- Operating voltage (V) : HTA

/ Associated products

	Reference	Designation
	LW06-03	Jumper cable holder
	LW06-02	Temporary load disconnect switch
	LW10-07	Insulated cradle for 63/90 kV
	LW06-01	Temporary lock-out tag-out switch

Product reference	Weight (kg)	Isolating length	Total length
LW04-19-100	9,0	0,6 m	1,0 m
LW04-19-150	10,0	1,1 m	1,5 m