




See online
technical sheet

/ LW08-20 Opening clevis pulley

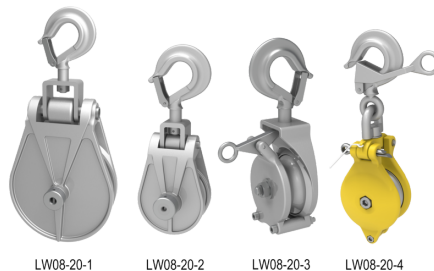

/ Use

The pulley is used as a return or reeving pulley for ropes (hoist rope, service rope, maneuvering rope, etc.).
Opening" type pulley in aluminum alloy.
Sheave preserves the insulating rope.
Hook with locking latch and gripping ring for models for models 1 and 4.
Opening clevis with captive pin.
Maximum rope diameter: 16 mm.

/ Areas of activity



Electrical distribution



Transport

/ Technical specifications

- **Pulling undwinding devices** : Undwinding devices
- **Product type** : Pulley
- **Operating voltage (V)** : HTA (1 000 V to 50 000 V), HTB (> 50 000 V)

Product reference	CMU (daN)	Total length	Weight (kg)	Bottom diameter (mm)
LW08-20-1	500 au crochet	400x460x85mm	3,0	130
LW08-20-2	250 au crochet	270x90x80mm	1,5	60
LW08-20-3	500 au crochet	275x120x75mm	2,0	60
LW08-20-4	240 au crochet	285x130x65mm	1,2	60