


/ LW08-34 Scaffolding cleat



See online
technical sheet

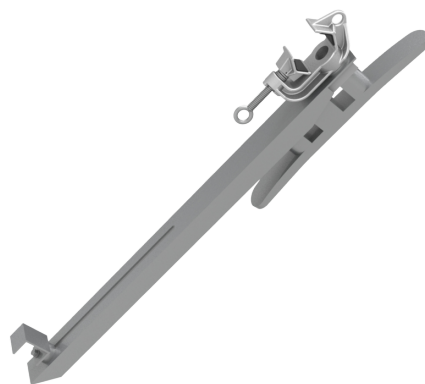

/ Use

The scaffolding cleat is used to create an anchoring point on a metallic scaffolding.
Tightening torque on installation: 1.8 daN.m / 15.95 lb.ft

/ Technical specifications

- Operating voltage (V) : HTB (> 50 000 V)
- Length (mm) : 100
- Width (mm) : 200
- Height (mm) : 300
- Weight (kg) : 3,5
- Tightening capacity (mm) : Ø30 à 50mm
- CMU (daN) : 60