




See online  
technical sheet

## / LW07-10

4-Hooks tower type saddle

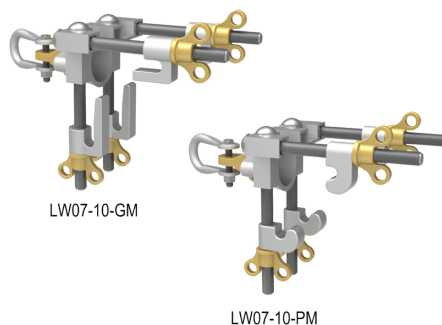

## / Use

Used to support conductor support sticks on towers.

This saddle is securely fastened to the angle-iron tower leg by three hooks tightened by wing nuts.

A clevis which bolts through the pivot lug permits rope blocks to be fastened.

This allows rope blocks to pivot with the conductor support sticks.

The use of a rope block is recommended for the maneuvering of the support stick Ø 64 mm (2 ½").

When the saddle is to be used on angle-iron tower legs larger than 100 mm (4"), the fixing rods must be equipped with appropriate hooks and washers.

## / Areas of activity



Electrical distribution



Transport

## / Technical specifications

- Product type : Selle
- Operating voltage (V) : HTB
- Length (mm) : 600
- Width (mm) : 300
- Height (mm) : 170
- Pole-climbers max capacity (mm) : 70 à 190
- Weight (kg) : 7,4
- Maximum working load (MWL) : Avec rallonge de selle : 320daN Sans rallonge de selle : 450daN

## Product reference

LW07-10-PM

LW07-10-GM