




See online
technical sheet

/ ISOL353TELO

Insulating sheeting for temporary protection against accidental contact when performing work on electrical installations under voltage up to 1000 v

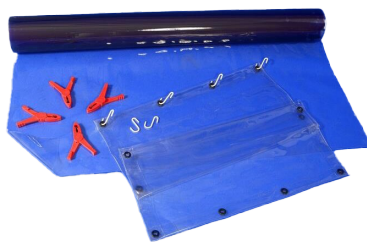

/ Use

CONFORMS, IN THE PRESCRIBED DIMENSIONS, TO ENEL DISTRIBUTION TECHNICAL SPECIFICATION EA 0337.

CERTIFICATE OF CONFORMITY TO CEI ENV 61112 CLASS 0 STANDARD

FEATURES

- Transparent color.
- Highly flexible material.
- 0.5 mm thickness.
- Test voltage 5 kV.
- Maximum current drawn at test voltage 0.4 mA.
- Tightness test 10 kV.
- Unit breaking load 19.1 N/mm².

/ Advantages

- Stronger
- Flexible

/ Areas of activity

-  Cable & Connections
-  Industry
-  Electric mobility

/ Technical specifications

- **Product type** : Insulating tablecloths
- **Support material** : Fireproof PVC
- **Operating voltage (V)** : BT (50 V to 1000 V)
- **Max voltage AC (V)** : 1000
- **Max voltage DC (V)** : 1500
- **Color** : Grey



/ Table legend

temporary-electrical-insulation / ISOL353TELO  / penta-table-legend

Lenght (m)	Width (m)	Support material finition
25	1,4	-
0,8	1	Notch