




See online
technical sheet

/ MR50

Rolling earth device for cables unreeling

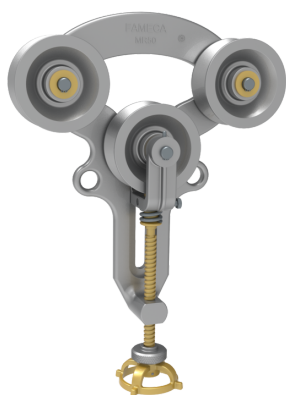

/ Standards

- CEI 61230

/ Use

This equipment is used to unwind overhead electrical cables.




Equipped with 2 upper pulleys and 1 lower pulley with adjustable pressure, to always ensure effective contact when unwinding the cable.

The rear of the unit can accommodate TFK-type earth cables fitted with Ø10mm connectors, mounted with an M10 stainless steel screw.

/ Advantages

- High clamping capacity
- Ensures effective contact with the cable

/ Areas of activity

-  Electrical distribution
-  Civil security
-  Transport

/ Technical specifications

- Product kind : Clamps
- Clamp material : Aluminium
- Clamp tightening (mm) : Ø5 à 50mm
- Conductor type : Round
- Operating voltage (V) : BT (50 V to 1000 V), HTA (1 000 V to 50 000 V), HTB (> 50 000 V)
- Field of use (environment) :
- Short-circuit intensity kA/Is : 25
- Measurement : 500x450x250mm
- Weight (kg) : 5

