



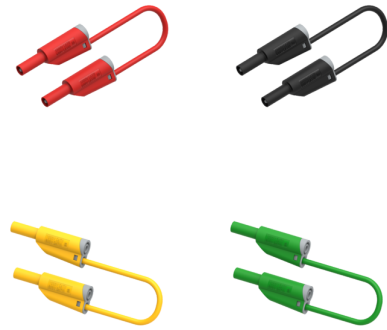

See online technical sheet

/ 2617-IEC-100V

IP2X 4 mm stackable safety lead

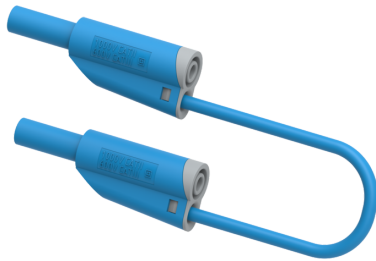

/ Standards

IEC 61010-031

/ Use

Recommended for use with safety fuse holders ref. TP 83, all appliances with Ø 4 mm socket and clamp ref. TP51.

/ Technical specifications

Safety lead fitted at each end with a 4 mm safety plug (with rigid sleeve)

Extra-flexible double-insulated PVC cable, section 2.5 mm².

Dedicated Intensity : Max. 32 A.

Dedicated voltage: 600V CAT III - 1000V CAT II