


/ GWIR8HN



Ver la ficha técnica
en línea



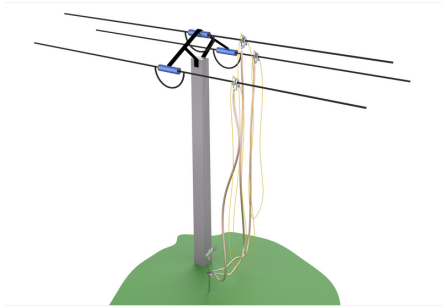


/ Normas

- CEI 61230
- IEC 62192

/ Ventajas

- Easy to use on all types of terrain without climbing
- Automatic spring clamp, no manual tightening required
- Low weight constraints
- Fast and easy to use
- Installation of a very high ground malt from the ground level

/ Areas de actividad












-  Distribución de electricidad
-  Protección civil
-  Transporte

/ Características

- Product kind : Dispositif
- Clamp material : Aluminium
- Clamp tightenning (mm) : Ø3 à 32mm
- Conductor type : Round
- Operating voltage (V) : HTA (1 000 V to 50 000 V)
- Field of use (environment) : Aerial or transformation station
- Way of access : From the floor
- Short-circuit intensity kA/Is : 8
- Phase câble
- Phase cable number : 2
- Phase(s) cable cross-section (mm²) : 35
- Phase(s) cable length (m) : 15
- Floor cable
- Cross-section (mm²) : 35
- Floor cable lenght (m) : 15
- Insulating rope : 3 x 25m



/ Productos contenidos en el kit

| | Referencia | Designación |
|---|-------------|--|
|  | TSK3515 | TSK type earthing cable, 35mm ² section. |
|  | 5150101 | Strap Christophe |
|  | 701 | Hexagonal ground rod. |
|  | PAC332 | Spring clamp for rope-operated MALT and MCC devices from the ground |
|  | N3B8 | Tornos de tierra triple |
|  | DI06CEI | This strand polypropylene rope is made by high tenacity monofilament fibers. |
|  | H701 | Carrying case |
|  | HMALTROUL | Carrying bag for grounding device |
|  | DROPOVERVAT | DROPOVERVAT |
|  | PPAC332 | Tray for PAC332 clamp |
|  | LEST500 | LEST500 |