


/ MRAC-O08
Oval quick link 8 mm



Ver la ficha técnica
en línea

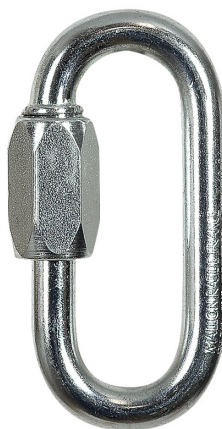

/ Normas

EN 362-Q / EN 12275-Q

/ Uso

To be used as a lowering anchorage, for fixed quickdraws, work at height, industrial safety and rescue.

/ Características

Oval quick link in zinc-plated steel, diameter 8 mm, opening 11 mm.
Resistance : 35 kN.

Ventajas

High breaking strength for the different axes.