



Ver la ficha técnica
en línea

/ MTAGX









/ Normas

- IEC 61243-1: VOLTAGE DETECTORS CAPACITIVE TYPE TO BE USED FOR VOLTAGES EXCEEDING 1 kV A.C
- Conformidad CE

/ Ventajas

- This multi range detector acts as up to 3 voltage detectors with 3 separated ranges: lower range, median range and upper range.
- Loud indication sound (the 100 dB at 1m)
- The visual indication is visible in all positions
- Direct access to the battery and sealed electronics compartment (IP65)
- Permanent standby status with automatic wake up function
- The presence of voltage within the calibrated range or above is indicated by a RED light and abeeeping sound
- Self test OK the OK status (ready for use) of the device is indicated by a GREEN light
- The self test checks all the circuits, the reference detection level and the battery voltage
- The “ready for use” state is indicated by the green indication for 2 minutes
- A low battery level is indicated by an ORANGE light

/ Areas de actividad


- | | |
|---|--|
|  Distribución de electricidad |  Sub-estaciones |
|  Industria |  Tracción eléctrica |
|  Generación |  Transporte |

/ Características

- Power type : Alternating power
- Network frequency (Hz) : 50/60
- Condition of use : Inside, Outside
- Temperatura de funcionamiento (C°) : -25...+55
- Humedad (máx.) (%) : 96
- Battery type : 9V battery (x1)
- Material de la carcasa : Policarbonato
- Color : Yellow
- Measurement (mm) : 280 x 59 x 59
- Weight (kg) : 0,390
- Nivel de señal acústica : 100 dB



Acceso pila

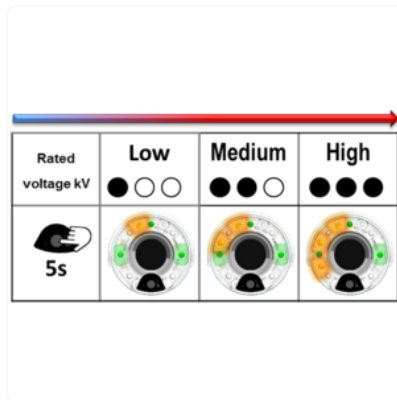

Selección rango de voltaje



Indicación de presencia de una tensión / Sin indicación de voltaje

/ Table legend

Other stick adaptors available on request.
Metal case available on request.

Product reference	1ª gama de tensión (kV)	3ª gama de tensión (kV)	2ª gama de tensión (kV)	Packaging	Notice	Connector type
MTAGX0369FHUA-3	3-6,6	45-69	10-36	Soft case with conductive lining for EMC protection	PACK F (FR/GB/DE/ES/PT/PL)	Universal (U), APV
MTAGX0669FHUA-2	6-20	-	30-69	Soft case with conductive lining for EMC protection	PACK F (FR/GB/DE/ES/PT/PL)	Universal (U), APV
MTAGX1166FHUA-3	11	66	33	Soft case with conductive lining for EMC protection	PACK F (FR/GB/DE/ES/PT/PL)	Universal (U), APV
MTAGX0366FHUA-3	3-6,6	44-66	11-33	Soft case with conductive lining for EMC protection	PACK F (FR/GB/DE/ES/PT/PL)	Universal (U), APV
MTAGX0645FHUA-2	6-15	-	20-45	Soft case with conductive lining for EMC protection	PACK F (FR/GB/DE/ES/PT/PL)	Universal (U), APV
MTAGX0566GHUA-2	5,5-15	-	20-66	Soft case with conductive lining for EMC protection	PACK G (GB/GR/NL/BG/IT/AR/TR)	Universal (U), APV
MTAGX0233FCU-3	2-5	33	6,6-11	Plastic box	PACK F (FR/GB/DE/ES/PT/PL)	Universal (U)
MTAGX01100FHU-3	1-5	36-100	5-36	Soft case with conductive lining for EMC protection	PACK F (FR/GB/DE/ES/PT/PL)	Universal (U)
MTAGX0166FHUA-3	1-3	50-66	6-20	Soft case with conductive lining for EMC protection	PACK F (FR/GB/DE/ES/PT/PL)	Universal (U), APV
MTAGX0336FHUA-2	3,8	-	10-36	Soft case with conductive lining for EMC protection	PACK F (FR/GB/DE/ES/PT/PL)	Universal (U), APV
MTAGX0169FHUA-3	1-4	42-69	10-36	Soft case with conductive lining for EMC protection	PACK F (FR/GB/DE/ES/PT/PL)	Universal (U), APV
MTAGX0633FHUA-2	6,6-11	-	33	Soft case with conductive lining for EMC protection	PACK F (FR/GB/DE/ES/PT/PL)	Universal (U), APV
MTAGX0536FHUA-2	5-15	-	20-36	Soft case with conductive lining for EMC protection	PACK F (FR/GB/DE/ES/PT/PL)	Universal (U), APV