




See online technical sheet

/ C86D45-60

Pulling sleeve or cable puller in galvanized steel for LV and MV underground networks

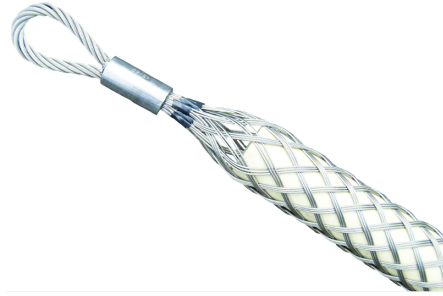

/ Use

Pulling sleeve specially designed to pull underground electric cables.

/ Technical specifications

Sheathed galvanized steel single loop sleeve.

- C86 3 : For underground connection LV HGE 33S33 cables from 3 x 16 mm² + 16 mm² (Ø 24.3 mm)
- C86 4 : For HN 33S33 network cables from 3 x 50 mm² + 50 mm² (Ø 30.4 mm) and 3 x 95 mm² + 50 mm² (Ø 34.7 mm),
For underground connection LV HGE 33S33 cables from 1 x 35 mm² + 35 mm² (Ø 27 mm),
For underground connection LV HGE 33S33 cables from 3 x 25 mm² + 25 mm² (Ø 29 mm) and 3 x 35 mm² + 35 mm² (Ø 30 mm)
- C86 5 : For HN 33S33 network cables from 3 x 150 mm² + 70 mm² (Ø 42.1 mm) and 3 x 240 mm² + 95 mm² (Ø 51.5 mm)
- C86 6 : For HN 33S23 network cables from 3 x 50 mm² + 25 mm² (Ø 68 mm) and 3 x 95 mm² + 25 mm² (Ø 75.8 mm)
- C86 7 : For HN 33S23 network cables from 3 x 150 mm² + 25 mm² (Ø 82.8 mm) and 3 x 240 mm² + 25 mm² (Ø 91.4 mm)

/ Table legend

Other dimensions available on request. For LV underground network cables or connections, use of a ref. E41-4 swivel is recommended.