




See online
technical sheet

/ LW03-07-32P-180

Pentagonal insulating universal stick

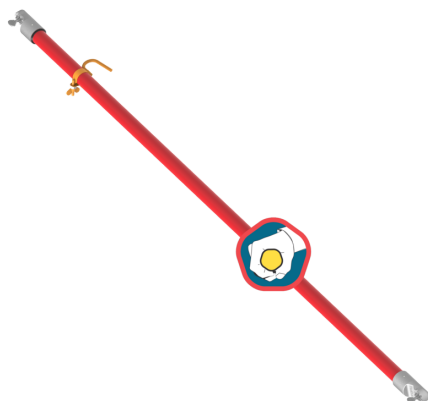

/ Standards

- CEI 60855-1
- ASTM F711
- IEC 60832-1
- ASTM F1825

/ Use

Ergonomic grip thanks to its pentagonal shape which is more adapted to the natural shape of the hand. The pentagonal insulating universal stick allows the use of tools with a universal attachment. Universal end fittings are located at each end of the stick.

Insulating tube in pentagonal shape, fiberglass over the foam core.

Universal end fittings with thumbscrews (M8 thread), made of corrosion-resistant metal.

/ Advantages

- Comfortable handling
- Lighter
- More rigid in flexion
- A solution for all tensions
- Varnish finish
- High UV resistance and longevity
- High mechanical strength

/ Areas of activity

-  Electrical distribution
-  Transport

/ Technical specifications

- Pole kind : Fixed
- Work type : Live working
- Operating voltage (V) : HTA (1 000 V to 50 000 V), HTB (> 50 000 V)
- Pipe kind : Pentagonal
- Pole weight (kg) : 1.2
- Pole weight (pounds) : 2.6
- Pipe diameter (mm) : 32
- Pipe diameter (inch) : 1"1/4
- Color : Red
- Total length (m) : 1.80
- Total length (inch) : 5'10"
- Longueur isolante (m) : 1.70
- Insulating length (inch) : 5'6"